




## Panel Hub S1 Plus (Desktop Version)

### Product Introduction

Panel Hub S1 Plus (Desktop Version) is a full-screen desktop control panel featuring integrated Xiaoqiao Voice. Its flexible design allows for either wall-mounted or standalone placement, extending smart control to any surface—desks, nightstands, coffee tables, and more. It delivers a more convenient touchscreen experience, controlling multiple devices and scenarios to create seamless, whole-home smart control at your fingertips.

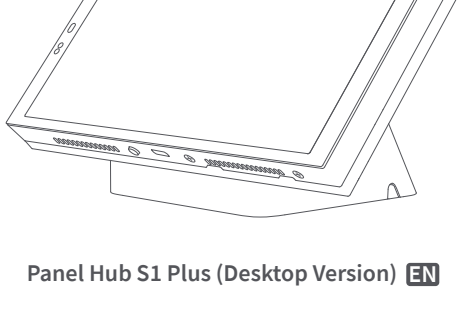


### Safety Consultation and Precautions


1. Power Requirements: Use only with a power adapter rated at 5V/2A or higher, and connect it using the provided power cable.
2. Moisture Prevention: Keep the device dry. Do not expose it to water or other liquids. Avoid splashing, dripping, or placing any liquid-filled containers (such as water cups) on the device.
3. Software Updates: To avoid malfunction or potential personal data leaks, do not use unauthorized third-party software to update the device's firmware or system. It is strongly recommended to use the official online update feature.
4. Operating Altitude: This product is designed for safe operation at altitudes below 2,000 meters.
5. Servicing: Do not attempt to disassemble or repair the product yourself. All servicing should be performed by authorized professional personnel.
6. Operating Environment: For indoor use only. Do not use in damp, wet, or outdoor environments.
7. Heat Sources: Keep the device away from heat sources.
8. Screen Care: Do not scratch the touchscreen with sharp objects.

### Quick Setup


1. Download the app  
Search for “Aqara Home” in the app store or scan the QR code below to download the “Aqara Home” app.




2. Select the installation location for the Touchscreen Dial V1 (Desktop Version): It is best to place it approximately 2-6 meters away from your home router. Avoid placing metal objects between the router and the device, as well as around the device itself.

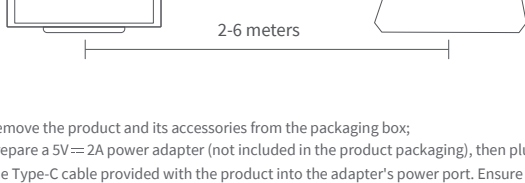

3. Remove the product and its accessories from the packaging box;
4. Prepare a 5V = 2A power adapter (not included in the product packaging), then plug the Type-C cable provided with the product into the adapter's power port. Ensure the plug is fully inserted to confirm the connection is complete.

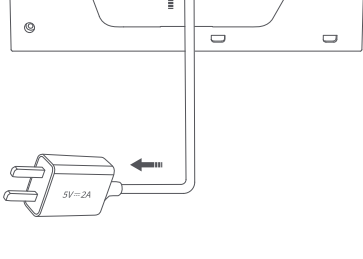

5. Power on the device to activate it. Wait for the device to complete its startup process, after which you will be directed to the network setup page.

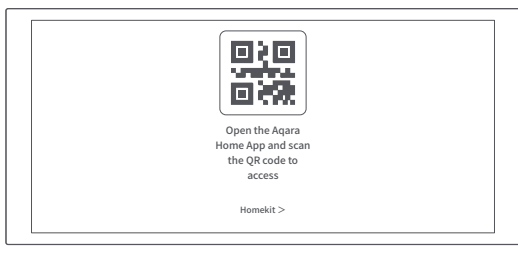

6. Please place your phone as close to the device as possible for connection, and ensure both your phone and the device are connected to the same Wi-Fi network (2.4GHz or 5.8GHz).
7. Open the Aqara Home app, tap the “+” icon in the top-right corner of the home screen, select “Touchscreen Dial V1”, or simply scan the QR code displayed on the screen. Follow the app's instructions to complete the setup and pairing process.
8. If the addition fails, please select Retry on the panel and retry adding in the app. For assistance, please visit: [www.aqara.com/support](http://www.aqara.com/support).

If device addition fails, please verify the following points:

- \* The Wi-Fi name or password contains unsupported special characters, preventing connection to the router. Modify it to common characters and try again;
- \* The device does not currently support WPA/WPA2 enterprise-level Wi-Fi networks;
- \* Check if the router has enabled Wi-Fi anti-intrusion settings, preventing the device from connecting normally;
- \* Verify if the router has enabled AP isolation, preventing the phone from detecting the device within the local network;
- \* It is recommended not to connect to a bridged network.

If HomeKit pairing fails, please verify the following:

- \* If you see the message “Unable to add accessory,” repeated failed attempts may cause iOS to cache erroneous information that cannot be cleared. Restart your iOS device and reset it before trying again. If it still fails, check your router's compatibility and try using a different router.

- \* If you see the message “Accessory added,” restart your iOS device and reset the device. Then manually enter the HomeKit setup code to add it again.
- \* If you see the message “Accessory not found,” reset the device. Wait 3 minutes, then manually enter the HomeKit setup code to add it again.

### 3. Reset Network

After successfully adding the panel, navigate to the System Settings page. Select Account > Logout, then follow the on-screen prompts to re-register and bind the device to the network.

### 4. Reset Device

After successfully adding the panel, navigate to the System Settings page. Select Advanced Settings > Restore Factory Settings, then follow the on-screen prompts to perform a factory reset, clearing all device data.

### 5. Restart Device

After successfully adding the panel, navigate to the System Settings page. Select Advanced Settings > Restart Device and follow the on-screen prompts to restart the device.

### 6. Voice Control

This product features a built-in voice assistant, allowing you to directly control smart devices or check relevant statuses via voice commands. You can say:

“Hey Xiaoqiao, open the living room curtains.”

“Hey Xiaoqiao, what's the weather like tomorrow?”

“Hey Xiaoqiao, I'm home.”

“Hey Xiaoqiao, what's the temperature in the bedroom?”

\* Product images and screen content in the above pages are for illustrative purposes only. Actual product appearance (including but not limited to appearance, color, and dimensions) and screen display content (including but not limited to background, UI, and accompanying images) may vary slightly. The physical product shall prevail.

\* We reserve the right to modify or adjust the above content without prior notice if necessary.

### Basic Parameters

Panel Hub S1 Plus (Desktop Version)

Model: MP-K05D

Dimensions: 172.6 × 100.5 × 89.8mm

Wireless Protocols: Wi-Fi IEEE 802.11 a/b/g/n/ac 2.4GHz/5GHz, Zigbee IEEE802.15.4, Bluetooth

TYPE-C Input: 5V = 2A

Screen Resolution: 1440 × 720

Operating Temperature: -10~40°C

Operating Humidity: 0~95% RH

Implementation Standards: GB 4943.1-2022

1. The Zigbee technology used in this product complies with the technical requirements for Class F general-purpose low-power devices specified in the “Catalog and Technical Requirements for Low-Power Short-Range Radio Transmission Equipment,” intended for data transmission applications. It incorporates an integrated antenna. For control, adjustment, and switching methods, refer to the relevant sections in the product manual.
2. Do not alter the intended usage scenarios or conditions, expand the transmission frequency range, increase transmission power (including adding RF power amplifiers), or modify the transmission antenna without authorization.
3. This device must not cause harmful interference to other lawful radio stations and shall not claim protection from harmful interference.
4. This device must tolerate interference from industrial, scientific, and medical (ISM) equipment or other lawful radio stations.
5. If harmful interference occurs to other lawful radio stations, operation must cease immediately. Use may resume only after taking measures to eliminate the interference.
6. When using low-power equipment within aircraft or in electromagnetic environment protection zones designated by laws, regulations, national provisions, or standards—such as radio astronomy observatories, weather radar stations, satellite earth stations (including tracking, telemetry, reception, and navigation stations), and military/civilian radio stations/stations at airports—compliance with electromagnetic environment protection regulations and relevant industry authority requirements is mandatory;
7. The use of any type of model remote controller is prohibited within a 5000-meter radius centered on the runway centerline of an airport.
8. The operating temperature range for low-power devices is -10°C to 40°C, with a power supply of 5V = 2A.

Manufacturer: Lumi United Technology Co., Ltd.

Address: Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China.

Online Customer Service: [<http://www.aqara.com/support>](<http://www.aqara.com/-support>)

Email: [support@aqara.com](mailto:support@aqara.com)